



CARRETILLAS ELEVADORAS

SGLIFT S.L.U


Polg Malpica-Alfinden C/ Nogal 59-50171

CIF B-99396392

Zaragoza -España

Tel/fax 876532223

E-mail: sglift@sglift.es

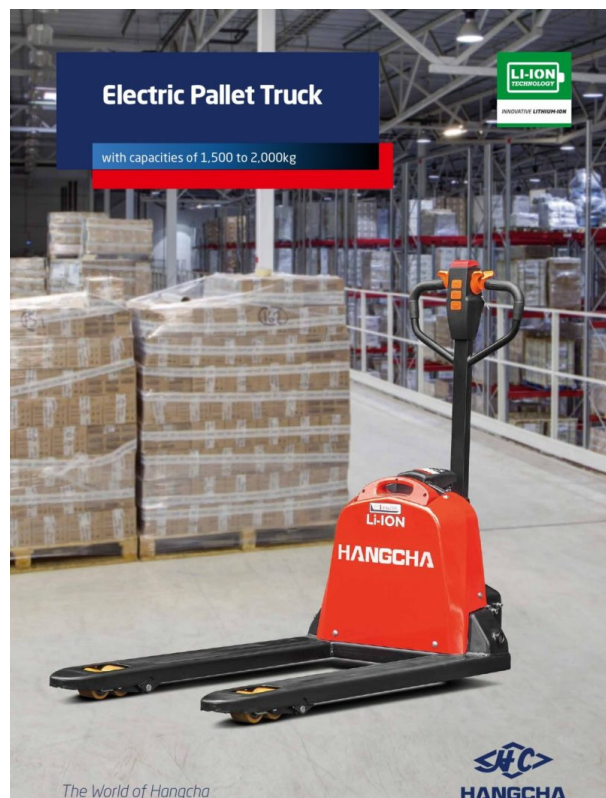

TRANSPALETA ELECTRICA CBD15 -JH

~~1.900,00 €~~ 1.750,00 € + IVA

CAPACIDAD: 1500kg

MEDIDAS: 680X1000

BATERIA: 24V-30Ah

CARGADOR: 24V-10Ah

RODILLO: Doble

PROMOCION HASTA FINALIZAR STOCK
unidades limitadas

SKU: N / A

Categorías: [Transpaleta eléctrica](#)



CARRETILLAS ELEVADORAS

SGLIFT S.L.U

Polg Malpica-Alfinden C/ Nogal 59-50171

CIF B-99396392

Zaragoza -España

Tel/fax 876532223

E-mail: sglift@sglift.es

GALERÍA DE IMÁGENES

Electric Pallet Truck

Introduction

The truck is simple and dexterous, with small turning radius and small weight. It is suitable for ultra-narrow channel operation.
The truck has compact and reliable structure. The oil pipeline and line are wrapped in the truck body which is safe and beautiful and convenient for user maintenance.
The truck adopts integrated handle design integrating key switch and electric meter which is simple and comfortable for operation.
Hand held lithium battery makes battery changing easier and more convenient.
Standard configuration of emergency stop switch and emergency reverse device ensure truck safety.
The truck is assembled with power-off braking function.
The truck is braked as soon as the handle is loosened or pressed to the bottom.
Electromagnetic braking and motor braking are used to ensure the safety of driving.


Options

Auxiliary wheels
Rema handle with pin code
Chargers 48V/15Ah, 48V/10Ah (for 2.0t)
In and out of the double-sided pallet rack
Electric lowering
Single front wheel
Manual release



Electric Pallet Truck Specification

		HANGCHA GROUP CO., LTD.	
Characteristics	1.2 Manufacturer	HANGCHA GROUP CO., LTD.	
	1.3 Model	08015-JH	08010-JH
	1.4 Power	Electric	Electric
	1.5 Operator type	Foot pedal	Foot pedal
	1.6 Load capacity / Rated load	1.5t	2.0t
Length	1.7 Load center distance	600	600
	1.8 Load distance, center of drive axle to fork	344	344
	1.9 Wheelbase	1210	1245
	2.1 Service weight without battery	kg	137
			141
Height	3.1 Lifting type	FD	FD
	3.2 Drive wheel size	Ø160-70	Ø160-70
	3.3 Fork wheel size	Ø80-60	Ø80-60
	3.4 Lifting, lowering, forward (x + drive)	50%	50%
	3.5 Travel rate	4000/25	4000/25
Dimension	4.1 Lift height	mm	260
	4.2 Height of drive in drive position with / rise	mm	740/1100
	4.3 Forward height	mm	85
	4.4 Overall length	mm	1800
	4.5 Length to rear of fork	mm	450
	4.6 Overall width	mm	550/600
	4.7 Fork distance	mm	500/550/600
	4.8 Width across fork	mm	550/600
	4.9 Ground clearance, center of wheelbase	mm	35
	4.10 Fork width for pallet 1000 x 1200 mm	mm	1000
	4.11 Fork width for pallet 800 x 1200 mm	mm	1000
	4.12 Fork width for pallet 600 x 1200 mm	mm	1000
	4.13 Fork width for pallet 400 x 1200 mm	mm	1000
	4.14 Fork width for pallet 200 x 1200 mm	mm	1000
Performance	5.1 Travel speed, forward	km/h	4.0/4.5
	5.2 Travel speed, reverse	km/h	4.0/4.5
	5.3 Service brake	Electromagnetic	Electromagnetic
	5.4 Drive motor rating at 55 Hz	kw	0.75
	5.5 Drive motor rating at 55 Hz	kw	0.8
Drive	6.1 Battery according to DIN 40532 (DIN 40532)	no	no
	6.2 Battery voltage rated capacity	Ah	2400
	6.3 Battery weight (1.5t)	kg	2400
	6.4 Battery weight (2.0t)	kg	2400
	6.5 Battery weight (2.5t)	kg	2400
Other	7.1 Type of drive control	DC	DC
	7.2 Steered wheel at driver's seat	4WD	4WD
	7.3 Steering type	Mechanical steering	Mechanical steering





CARRETILLAS ELEVADORAS

SGLIFT S.L.U

Polg Malpica-Alfinden C/ Nogal 59-50171

CIF B-99396392

Zaragoza -España

Tel/fax 876532223

E-mail: sglift@sglift.es

DESCRIPCIÓN DEL PRODUCTO

La transpaleta eléctrica está pensada para el transporte de mercancías dentro de naves, centros logísticos o fábricas, para la carga y descarga en espacios reducidos o para la preparación de pedidos a bajo nivel.

Nuestras maquinas son entregadas a los clientes luego de realizar una revisión técnica completa y de su restauración.

Ofrecemos opción de compra, alquiler o renting.

Opción de pago:

- Transferencia bancaria

- Financiación