



CARRETILLAS ELEVADORAS

SGLIFT S.L.U


Polg Malpica-Alfinden C/ Noyal 59-50171

CIF B-99396392

Zaragoza -España

Tel/fax 876532223

E-mail: sglift@sglift.es

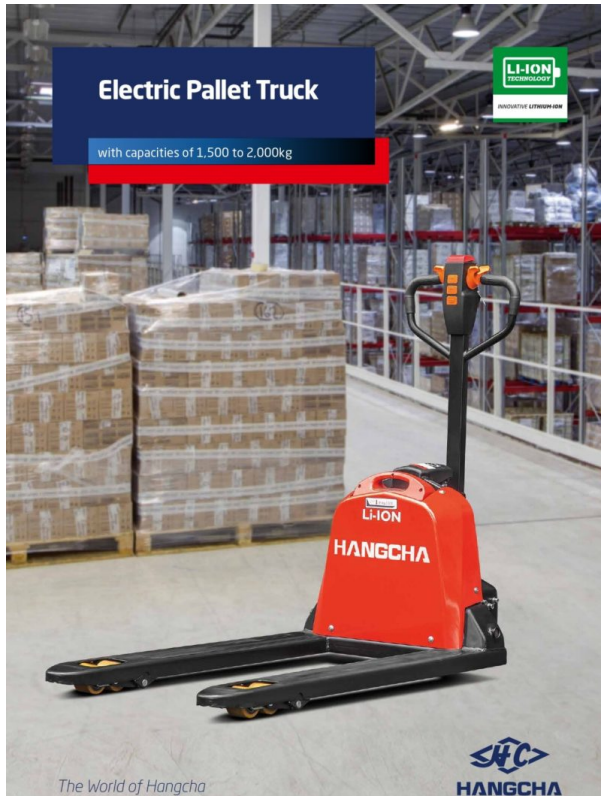

TRANSPALETA ELECTRICA CBD15 -JH

~~1.900,00 €~~ **1.750,00 €** + IVA

CAPACIDAD: 1500kg

MEDIDAS: 680X1000

BATERIA: 24V-30Ah

CARGADOR: 24V-10Ah

RODILLO: Doble

PROMOCION HASTA FINALIZAR STOCK
unidades limitadas

SKU: N / A

Categorías: [Transpaleta eléctrica](#)



CARRETILLAS ELEVADORAS

SGLIFT S.L.U

Polg Malpica-Alfinden C/ Noyal 59-50171

CIF B-99396392

Zaragoza -España

Tel/fax 876532223

E-mail: sglift@sglift.es

GALERÍA DE IMÁGENES

Electric Pallet Truck

Introduction

The truck is simple and dexterous, with small turning radius and small weight. It is suitable for ultra-narrow channel operation.
 The truck has compact and reliable structure. The oil pipeline and line are wrapped in the truck body which is safe and beautiful and convenient for user maintenance.
 The truck adopts integrated handle design integrating key switch and electric meter which is simple and comfortable for operation.
 Hand-held lithium battery makes battery changing easier and more convenient.
 Standard configuration of emergency stop switch and emergency reverse device ensure truck safety.
 The truck is loaded as soon as the handle is loosened or pressed to the bottom.
 Electromagnetic braking and motor braking are used to ensure the safety of driving.


Options

As auxiliary wheels
 Roma handle with pin code
 Chargers 48V/1.5Ah, 48V/1.0Ah (for 2.0t)
 In instead of the double-sided pallet rack
 Electric lowering
 Single front wheel
 Manual release



Electric Pallet Truck Specification

		HANGCHA GROUP CO., LTD.	
Characteristics	1.1 Model	08015-JH	08010-JH
	1.2 Power	08015	08010
Capacity	1.4 Operator type	Push-button	Push-button
	1.5 Load capacity / rated load	0.5t	0.5t
	1.6 Load center distance	600	600
	1.7 Load distance, center of drive axle to fork	344	344
	1.8 Wheelbase	1200	1200
Weight	2.1 Service weight without battery	137	141
	3.1 Lubricity type	F0	F0
Metric	3.2 Drive wheel size	Ø200-70	Ø200-70
	3.3 Free wheel size	Ø90-40	Ø90-40
	3.4 Lubricity, center to center (C × drive)	1.516	1.516
	3.5 Track size	100/100	100/100
	4.1 Lift height	760	760
	4.2 Height of fork in three position min./max	740/1100	740/1100
	4.3 Lowered height	85	85
	4.4 Drive shaft length	1000	1000
	4.5 Length of fork at forks	600	600
	4.6 Drive shaft length	550/605	550/605
Dimension	4.7 Fork dimension	100/100/100	100/100/100
	4.8 Fork access hole	550/605	550/605
	4.9 Ground clearance, center of wheelbase	35	35
	4.10 Fork width for pallet 1000 x 1200 mm (max)	1804	1804
	4.11 Fork width for pallet 800 x 1200 mm (max)	1854	1854
	4.12 The turning radius	1.208	1.208
	5.1 Travel speed, Latched condition	0.24/0.5	0.24/0.5
	5.2 Escalating speed condition	0.5	0.5
	5.3 Service brake	Electromagnetic	Electromagnetic
	Drive	6.1 Drive motor using 55.0/60W	55W
6.2 Lift motor using 55.0/35W		55W	35W
6.3 Battery according to DIN 45102/35/30/20Ah/6C/20		35	20
6.4 Battery voltage/nominal capacity		48V/1.5	48V/1.0
6.5 Battery weight (1.5Ah)		5.5	3.7
6.6 Type of drive control		DC	DC
Data	7.1 Sound level at driver's seat	88dB(A)	87dB
	7.2 Steering type	Mechanical steering	Mechanical steering





CARRETILLAS ELEVADORAS

SGLIFT S.L.U

Polg Malpica-Alfinden C/ Nogal 59-50171

CIF B-99396392

Zaragoza -España

Tel/fax 876532223

E-mail: sglift@sglift.es

DESCRIPCIÓN DEL PRODUCTO

La transpaleta eléctrica está pensada para el transporte de mercancías dentro de naves, centros logísticos o fábricas, para la carga y descarga en espacios reducidos o para la preparación de pedidos a bajo nivel.

Nuestras maquinas son entregadas a los clientes luego de realizar una revisión técnica completa y de su restauración.

Ofrecemos opción de compra, alquiler o renting.

Opción de pago:

- Transferencia bancaria

- Financiación