



CARRETILLAS ELEVADORAS

SGLIFT S.L.U


Polg Malpica-Alfinden C/ Nogal 59-50171

CIF B-99396392

Zaragoza -España

Tel/fax 876532223

E-mail: sglift@sglift.es

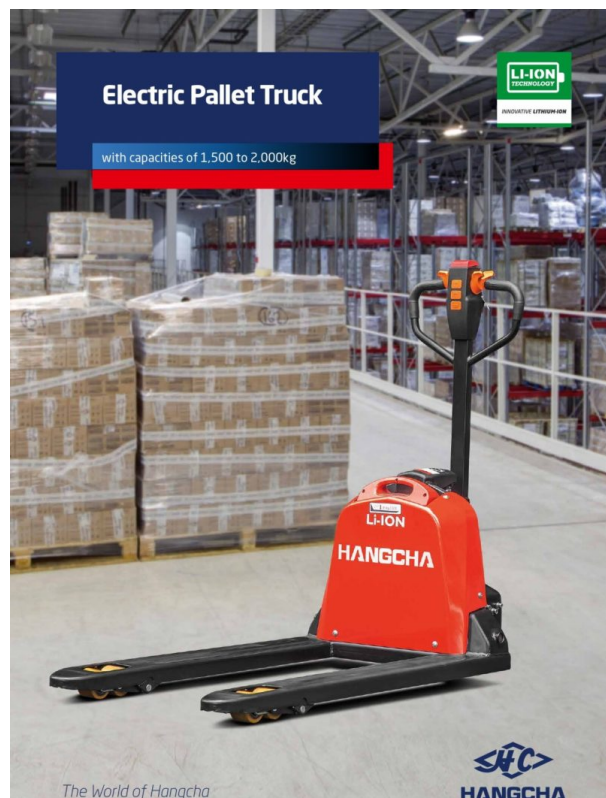

TRANSPALETA ELECTRICA CBD15 -JH

~~1.900,00 €~~ 1.750,00 € + IVA

CAPACIDAD: 1500kg

MEDIDAS: 680X1000

BATERIA: 24V-30Ah

CARGADOR: 24V-10Ah

RODILLO: Doble

PROMOCION HASTA FINALIZAR STOCK
unidades limitadas

SKU: N / A

Categorías: [Transpaleta eléctrica](#)



CARRETILLAS ELEVADORAS

SGLIFT S.L.U

Polg Malpica-Alfinden C/ Nogal 59-50171

CIF B-99396392

Zaragoza -España

Tel/fax 876532223

E-mail: sglift@sglift.es

GALERÍA DE IMÁGENES

Electric Pallet Truck

Introduction

The truck is simple and dexterous, with small turning radius and small weight. It is suitable for ultra-narrow channel operation.
The truck has compact and reliable structure. The oil pipeline and line are wrapped in the truck body which is safe and beautiful and convenient for user maintenance.
The truck adopts integrated handle design integrating key switch and electric meter which is simple and comfortable for operation.
Hand held lithium battery makes battery changing easier and more convenient.
Standard configuration of emergency stop switch and emergency reverse device ensure truck safety.
The truck is assembled with power-off braking function.
The truck is braked as soon as the handle is loosened or pressed to the bottom.
Electromagnetic braking and motor braking are used to ensure the safety of driving.


Options

Auxiliary wheels
Rema handle with pin code
Chargers 48V/15Ah, 48V/10Ah (for 2.0t)
In and out of the double-sided pallet rack
Electric lowering
Single front wheel
Manual release



Electric Pallet Truck Specification

		HANGCHA GROUP CO., LTD.	
Characteristics	1.2	Manufacturer	
	1.2	Model	08015-JH 08010-JH
	1.3	Power	Electric
	1.4	Operator type	Foot pedal
Capacity	1.5	Load capacity / Rated load	1.5t
	1.6	Load center distance	600
	1.7	Load distance, center of drive axle to fork	384
	1.8	Wheelbase	1200
Length	2.1	Service weight without battery	145
	3.1	Lifted height	700
	3.2	Drive wheel size	Ø1200-70
	3.3	Front wheel size	Ø400-10
Width	3.4	Minimum turning radius (r = drive)	1000
	3.5	Track size	4000/15
	4.1	Lift height	700
	4.2	Height of drive in drive position (r = rise)	740/1100
Dimensions	4.3	Lowered height	85
	4.4	Over all length	1800
	4.5	Length to base of forks	600
	4.6	Over all width	500/485
Performance	4.7	Top speed	10/10/10/10
	4.8	Max speed	10/10/10/10
	4.9	Ground clearance, center of wheelbase	35
	4.10	Drive shaft to axle 1000 x 1200 (mm)	1000
Drive	4.11	Drive shaft to axle 1000 x 1200 (mm)	1000
	4.12	Drive shaft to axle 1000 x 1200 (mm)	1000
	4.13	Drive shaft to axle 1000 x 1200 (mm)	1000
	4.14	Drive shaft to axle 1000 x 1200 (mm)	1000
Other	5.1	Turning speed, turn radius	10/10/10/10
	5.2	Turning speed, turn radius	10/10/10/10
	5.3	Service brake	Electromagnetic
	5.4	Drive motor rating (5.5 KW)	5.5
Drive	6.1	Drive motor rating (5.5 KW)	5.5
	6.2	Drive motor rating (5.5 KW)	5.5
	6.3	Drive motor rating (5.5 KW)	5.5
	6.4	Drive motor rating (5.5 KW)	5.5
Other	7.1	Turning speed, turn radius	10/10/10/10
	7.2	Turning speed, turn radius	10/10/10/10
	7.3	Turning speed, turn radius	10/10/10/10
	7.4	Turning speed, turn radius	10/10/10/10





CARRETILLAS ELEVADORAS

SGLIFT S.L.U

Polg Malpica-Alfinden C/ Nogal 59-50171

CIF B-99396392

Zaragoza -España

Tel/fax 876532223

E-mail: sglift@sglift.es

DESCRIPCIÓN DEL PRODUCTO

La transpaleta eléctrica está pensada para el transporte de mercancías dentro de naves, centros logísticos o fábricas, para la carga y descarga en espacios reducidos o para la preparación de pedidos a bajo nivel.

Nuestras maquinas son entregadas a los clientes luego de realizar una revisión técnica completa y de su restauración.

Ofrecemos opción de compra, alquiler o renting.

Opción de pago:

- Transferencia bancaria

- Financiación